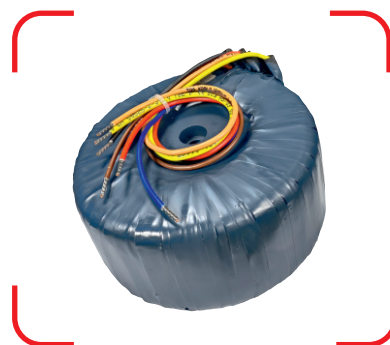
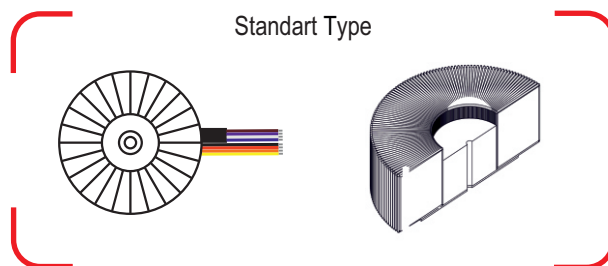
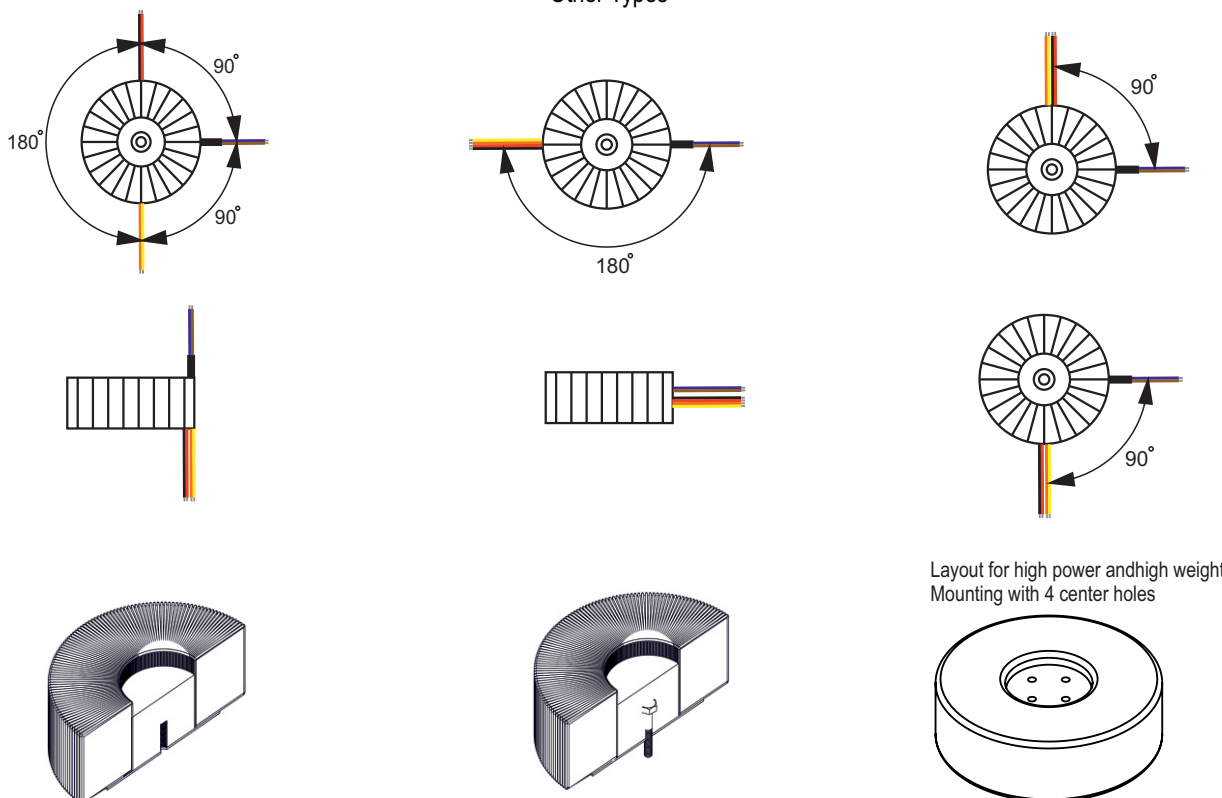






Toroidal fixed transformer with sealed centre hole as a mains, auto, safety or isolation transformers

Rated Power	: 25-10000 VA
Input Voltage	: 230 V or to customers demand
Output Voltage	: 6-230 V or to customers demand
Frequency	: 47-63 Hz
Temperature Class	: T40/E and T40/B
Max. Ambient Temperature	: 40 °C
Transformers Class	: Ip00
Test Voltage	: 4 Kv
Connections	: Stranded leads, stripped and tinned.
Standards	: EN 61558 ; EN 60601






Standart Type

Other Types


Technical changes and optimisation reserved. All details are guide values, variations are possible. other dimensions and technical changes on request.

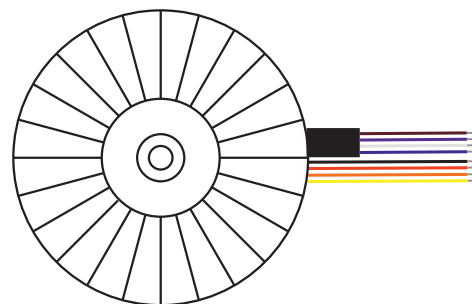Primary Connections

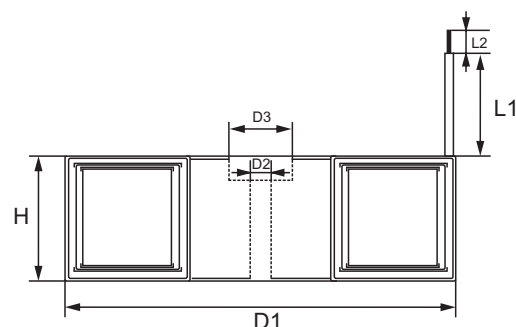

Secondary Connections



Output		Dimension (mm)						Weight
VA	Efficiency	D1	H	L1	L2	D2	D3	kg
25	% 82	Ø 62	31	300	10	4	8	0,45
30	% 84	Ø 75	30	300	10	4	8	0,54
40	% 88	Ø 77	35	300	10	4	8	0,70
50	% 88	Ø 80	38	300	10	4	8	0,75
60	% 88	Ø 85	38	300	10	4	8	0,80
80	% 90	Ø 90	96	300	10	5	10	1,00
100	% 91	Ø 94	40	300	10	5	10	1,25
120	% 92	Ø 97	48	300	10	5	10	1,35
150	% 93	Ø 98	50	300	10	5	10	1,65
200	% 94	Ø 115	50	300	10	6	12	2,05
250	% 94	Ø 118	60	300	10	6	12	2,55
300	% 94	Ø 127	65	300	10	6	12	2,95
400	% 95	Ø 135	65	300	10	6	12	3,70
450	% 95	Ø 140	68	300	10	6	12	4,00
500	% 96	Ø 145	74	300	10	8	16	4,25
600	% 96	Ø 155	70	300	10	8	16	5,20
800	% 97	Ø 182	67	300	10	8	16	6,20
1000	% 97	Ø 200	70	300	10	8	16	9,50
1200	% 97	Ø 200	75	300	10	10	20	9,70
1500	% 97	Ø 210	86	300	10	10	20	10,50
2000	% 97	Ø 220	100	300	10	10	20	15,50
2500	% 97	Ø 250	105	300	10	10	20	21,00
3000	% 97	Ø 250	115	300	10	12	24	26,00
4000	% 97	Ø 265	100	300	10	12	24	32,00
4500	% 97	Ø 275	100	300	10	12	24	34,00
5000	% 97	Ø 290	110	300	10	14	28	38,00
7000	% 97	Ø 320	150	300	10	14	28	44,00
10000	% 97	Ø 350	150	300	10	14	28	79,00

Technical changes and optimisation reserved. All details are guide values, variations are possible. other dimensions and technical changes on request.